



kitchen accessories

gastronorm

GN containers

SS 18/10 - standard



pos.	GEV No.	size	D (mm)	pos.	GEV No.	size	D (mm)
1	993102	GN 2/1	20	23	993047	GN 1/2	200
2	993103	GN 2/1	40	24	993111	GN 1/3	20
3	993104	GN 2/1	65	25	993112	GN 1/3	40
4	993105	GN 2/1	100	26	993048	GN 1/3	65
5	993030	GN 1/1	20	27	993049	GN 1/3	100
6	993020	GN 1/1	40	28	993050	GN 1/3	150
7	993019	GN 1/1	55	29	993051	GN 1/3	200
8	993033	GN 1/1	65	30	993107	GN 2/4	40
9	993018	GN 1/1	100	31	993108	GN 2/4	65
10	993035	GN 1/1	150	32	993109	GN 2/4	100
11	993036	GN 1/1	200	33	993110	GN 2/4	150
12	993037	GN 2/3	20	34	993113	GN 1/4	20
13	993038	GN 2/3	40	35	993052	GN 1/4	65
14	993039	GN 2/3	65	36	993053	GN 1/4	100
15	993040	GN 2/3	100	37	993054	GN 1/4	150
16	993041	GN 2/3	150	38	993055	GN 1/4	200
17	993106	GN 2/3	200	39	993056	GN 1/6	65
18	993042	GN 1/2	20	40	993057	GN 1/6	100
19	993043	GN 1/2	40	41	993058	GN 1/6	150
20	993044	GN 1/2	65	42	993059	GN 1/6	200
21	993045	GN 1/2	100	43	993060	GN 1/9	65
22	993046	GN 1/2	150	44	993061	GN 1/9	100

polycarbonate



pos.	GEV No.	size	D (mm)	pos.	GEV No.	size	D (mm)
1	993021	GN 1/1	65	9	993029	GN 1/3	65
2	993022	GN 1/1	100	10	993031	GN 1/3	100
3	993023	GN 1/1	150	11	993015	GN 1/3	150
4	993024	GN 1/1	200	12	993032	GN 1/3	200
5	993025	GN 1/2	65	13	993100	GN 2/4	65
6	993026	GN 1/2	100	14	993101	GN 2/4	100
7	993027	GN 1/2	150	15	993034	GN 1/4	65
8	993028	GN 1/2	200	16	993087	GN 1/4	100

pos.	GEV No.	size	D (mm)	pos.	GEV No.	size	D (mm)
17	993088	GN 1/4	150	20	993091	GN 1/6	150
18	993089	GN 1/6	65	21	993092	GN 1/9	65
19	993090	GN 1/6	100	22	993093	GN 1/9	100

lids



fig.	GEV No.	size	D (mm)	fig.	GEV No.	size	D (mm)
1	993074	GN 1/1		1	993080	GN 1/9	
1	993075	GN 2/3		2	993094	GN 1/1	
1	993076	GN 1/2		2	993095	GN 1/2	
1	993077	GN 1/3		2	993096	GN 1/3	
1	993078	GN 1/4		2	993097	GN 1/4	
1	993079	GN 1/6		2	993098	GN 1/6	

bridges



fig.	GEV No.	L1 (mm)	L2 (mm)	W (mm)	H (mm)	Qty (pcs)
1	692378	325	295	23	14	1
1	692262	530	550	23	14	1

technical data:
material SS

hoses

supply hoses

PVC supply hoses



technical data:
operating pressure 10bar
temperature max. 90°C
approval KTW

fig.	GEV No.	NS	connections	L (mm)
1	520644	DN10	3/4"	1000+250/250

water softeners

manual softener



technical data:
control manual
version with 2 valves
diameter 190mm
width 255mm
operation pressure 1-8bar
water temperature 4-25°C
flow rate 1000l/h

fig.	GEV No.	container capacity (l)	amount of resin (l)	salt amount/regeneration (kg)	capacity at 16°dH/20°e/29°fH (l)	H (mm)	connection	type
1	530161	5	3.5	0.5	700	300	3/8"	LT5
1	530120	8	5.6	1	1120	400	3/8"	LT8
1	530199	8	5.6	1	1120	400	3/4"	LT8
1	530121	12	8.4	1.5	1680	500	3/8"	LT12
1	530201	12	8.4	1.5	1680	500	3/4"	LT12
1	530126	16	11.2	2	2240	600	3/8"	LT16
1	530202	16	11.2	2	2240	600	3/4"	LT16
1	530127	20	14	2.5	2800	900	3/8"	LT20
1	530203	20	14	2.5	2800	900	3/4"	LT20



technical data:
control manual
version with bypass valve
diameter 190mm
width 255mm
operation pressure 1-8bar
water temperature 4-25°C
flow rate 900l/h

fig.	GEV No.	container capacity (l)	amount of resin (l)	salt amount/regeneration (kg)	capacity at 16°dH/20°e/29°fH (l)	H (mm)	connection	type
1	530167	8	5.6	1	1120	400	3/8"	IV 8
1	530168	12	8.4	1.5	1680	500	3/8" / 3/4"	IV12
1	530169	16	11.2	2	2240	600	3/8"	IV16
1	530170	20	14	2.5	2800	900	3/8"	IV20

automatic softeners

with Autotrol control Logix 255/740 (timer)



technical data:
operation pressure 2-8bar
water temperature 6-25°C
flow rate 1500l/h
supply 230VAC

fig.	GEV No.	type	container capacity (l)	amount of resin (l)	salt amount/regeneration (kg)	capacity at 16°dH/20°e/29°fH (l)	W (mm)	L (mm)	H (mm)	connection
1	530808 ¹	GIX5	5	3.8	0.5	700	230	380	515	1/2"
1	530809 ¹	GIX8	8	5.6	1	1120	250	480	540	1/2"
1	530843 ¹	GIX8	8	5.6	1	1120	250	480	540	3/4"
1	530824 ¹	GIX12	12	8.4	1.5	1680	290	425	665	3/4"

¹no UK plug

water filters

CUNO

filters

for ice cube maker



technical data:
maximum operation pressure 8,6bar
water temperature max. 38°C

fig.	GEV No.	type	capacity (l)	FR (l/h)	for filter head
1	530091	HF20-SE	34069	342	VH3 BSPT
2	530258	HF30-S	52995	378	VH3 BSPT



for cold drinks



technical data:
maximum operation pressure 8,6bar water temperature max. 38°C

fig.	GEV No.	type	capacity (l)	FR (l/h)	for filter head
1	530377	AP-1-C301-S	3000	114	AP-1-301-S
2	530478	AP2-C405-SG	4000	114	AP2
3	530255	AP3-C765	7600	168	VH3 BSPT
3	530256	AP3-C762-M	7600	168	VH3 BSPT
4	530010	CS-25	7571	228	QL2/QL3
4	530011	CFS-9812-X	34069	342	QL2/QL3

connection heads



fig.	GEV No.	type	connection	version
1	530115	QL2	3/8" horizontal	without shut-off valve
2	530248	QL2B	3/8" horizontal	without shut-off valve



fig.	GEV No.	type	connection	version
3	530106	QL3	3/8" vertical	with shut-off valve
4	530249	QL3B	3/8" vertical	with shut-off valve

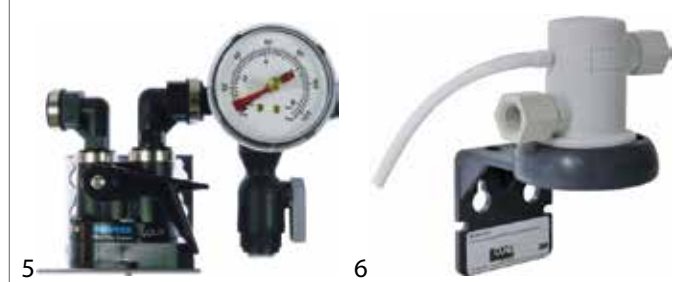


fig.	GEV No.	type	connection	version
5	530250	QL3Bi	3/8" vertical	with shut-off valve and manometer
6	530272	VH3 BSPT	3/8" horizontal	without shut-off valve



fig.	GEV No.	type	connection	version
7	530375	AP-1-301-S	1/4" NPT	-

EVERPURE

kits



fig.	GEV No.	type	application
1	530493	Claris ULTRA 1500	for ice-cube maker

filters

for ice cube maker



technical data:
water temperature 4-30°C
suitable filter head Claris

pos.	GEV No.	type	capacity (l)	operation p max (bar)
1	530390	Claris ULTRA 170	1500-1700	2-8
2	530385	Claris ULTRA 250	2250-2500	2-8
3	530386	Claris ULTRA 500	3750-4200	2-8
4	530387	Claris ULTRA 1000	7000-8500	2-8
5	530388	Claris ULTRA 1500	10000-12100	2-8
6	530389	Claris ULTRA 2000	16500-20000	2-8



technical data:
water temperature max. 38°C
suitable filter head QL2/QL3

fig.	GEV No.	type	capacity (l)	FR (l/h)	operation p max (bar)	H (mm)
1	530056	2K Plus	5678	114	8.5	260
2	530177	4K Plus	11300	114	10	370
3	530247	Insurice 2000	34200	378	8.5	530

for cold drinks



technical data:
water temperature max. 38°C
suitable filter head QL2/QL3

fig.	GEV No.	type	capacity (l)	FR (l/h)	operation p max (bar)	H (mm)
1	530233	2DC	2840	114	8.6	260
2	530113	AC	2850	114	10	260
3	530101	4C	11000	114	10	370
4	530231	4DC	11300	114	8.6	370
4	530234	2CB5	11355	228	8.6	206
4	530235	4CB5	22710	378	8.6	370
4	530166	MC2	34000	378	8.5	530
4	530236	7CB5	37854	378	8.6	530

connection heads

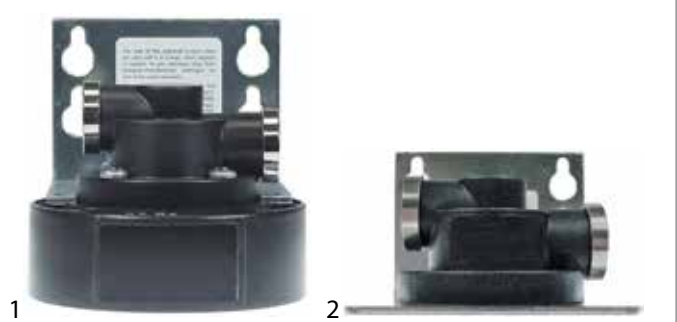


fig.	GEV No.	type	connection	version
1	530115	QL2	3/8" horizontal	without shut-off valve
2	530248	QL2B	3/8" horizontal	without shut-off valve



fig.	GEV No.	type	connection	version
3	530106	QL3	3/8" vertical	with shut-off valve
4	530249	QL3B	3/8" vertical	with shut-off valve



fig.	GEV No.	type	connection	version
5	530250	QL3Bi	3/8" vertical	with shut-off valve and manometer
6	530209	Claris	3/8" horizontal	without shut-off valve

tools

hand tools

pipe tools

MASTERCOOL

flaring tool sets



1

fig.	GEV No.	description
1	800416	flaring tool and expander set 2 flaring bars for 1/8",3/16",1/4",5/16",3/8",7/16",1/2",5/8",3/4" swaging adapter for 3/16",1/4",5/16",3/8",1/2",5/8",3/4"

flaring tools



1

fig.	GEV No.	for pipe ø
1	800411	1/4",3/8",1/2",5/8",3/4"
1	800412	6,8,10,12,14,16,18mm



2

fig.	GEV No.	for pipe ø
2	800413	3/16,5/16,3/8,1/2,5/8,3/4"
2	800414	4,6,8,10,12,15,16mm



3

fig.	GEV No.	for pipe ø
3	800415	3/16,5/16,3/8,1/2,5/8,3/4"

expanders



1

fig.	GEV No.	description
1	800339	hydraulic expander set 10mm,12mm,15mm,16mm,18mm,22mm,28mm