


IDPLUS 4 CONTROLLERS COVER ALL APPLICATIONS

IDPlus 902



cod. IDP11D07E0000

- PRE-SET:** 4 selectable pre-set applications
- PROBE INPUTS:** 1+1 optional
- PROBES:** NTC / Pt1000 / PTC selectable by parameter
- DIGITAL INPUTS:** 1
- DIGITAL OUTPUTS:** 8A SPDT
- POWER SUPPLY:** 230V
- DISPLAY RANGE:** -55°C ... +150°C decimal point setting by parameter

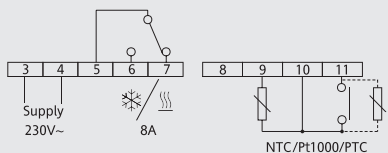


IDPlus 961



cod. IDP17D07E0000

- PRE-SET:** 4 selectable pre-set applications
- PROBE INPUTS:** 1+1 optional
- PROBES:** NTC / Pt1000 / PTC selectable by parameter
- DIGITAL INPUTS:** 1
- DIGITAL OUTPUTS:** 2Hp
- POWER SUPPLY:** 230V
- DISPLAY RANGE:** -55°C ... +150°C decimal point setting by parameter

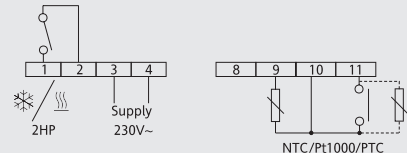


IDPlus 971



cod. IDP29DB7E0000

- PRE-SET:** 4 selectable pre-set applications
- PROBE INPUTS:** 2+1 optional
- PROBES:** NTC / Pt1000 / PTC selectable by parameter
- DIGITAL INPUTS:** 1+1 optional
- DIGITAL OUTPUTS:** 2Hp + 8A
- BUZZER:** YES
- POWER SUPPLY:** 230V
- DISPLAY RANGE:** -55°C ... +150°C decimal point setting by parameter

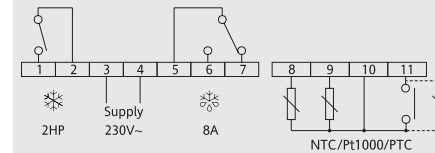


IDPlus 974




cod. IDP2EDB7E0000

- PRE-SET:** 4 selectable pre-set applications
- PROBE INPUTS:** 2+1 optional
- PROBES:** NTC / Pt1000 / PTC selectable by parameter
- DIGITAL INPUTS:** 1+1 optional
- DIGITAL OUTPUTS:** 2Hp + 8A + 5A
- BUZZER:** YES
- POWER SUPPLY:** 230V
- DISPLAY RANGE:** -55°C ... +150°C decimal point setting by parameter

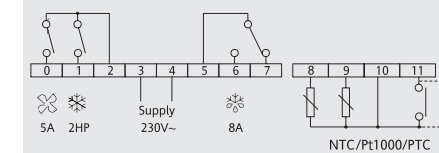


PROBES IP68 / 6X20

	NTC	SN8DAE11502C0	NTC 1,5m / -50...+110°C
		SN8DAE13002C0	NTC 3,0m / -50...+110°C
	Pt1000	SN9DAE11502C6	Pt1000 1,5m / -50...+110°C
		SN9DAE13002C6	Pt1000 3,0m / -50...+110°C
	PTC	SN7DAE11502C0	PTC 1,5m / -50...+110°C
		SN7DAE13002C0	PTC 3,0m / -50...+110°C



UNICARD USB

- > Quick and easy configuration
- > Download/copy instrument parameters
- > Power supply the controllers via USB

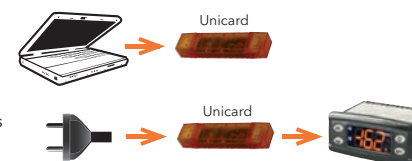

DOUBLE CONNECTIVITY

