


Item-No. 545093

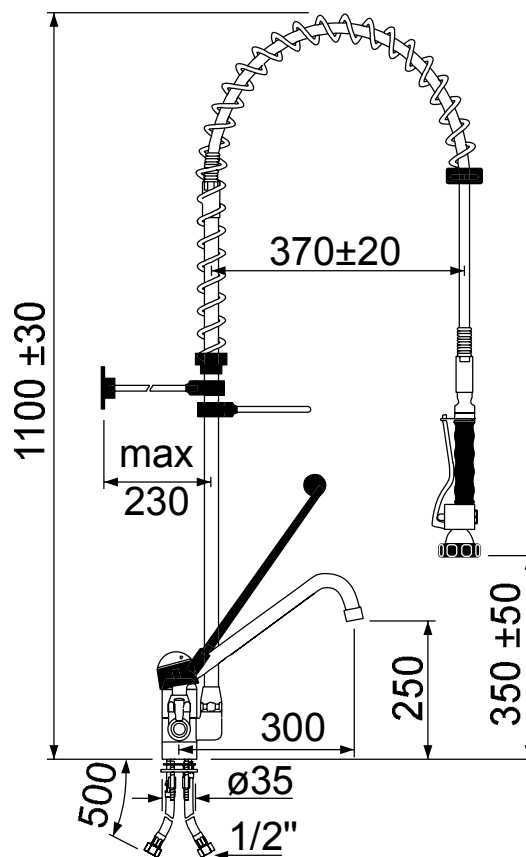

Technical Data

version	with single lever monobloc tap
type	Classic
upper part	ceramic cartridge $\varnothing 40$ mm
spout length	300mm

connection	$1/2"$
handle type	long lever
table opening	$\varnothing 35$ mm
spout height	250mm

Product Information

- single lever monobloc tap, chromated brass, with ceramic cartridge $\varnothing 40$ mm, with long plastic lever handle, table opening $\varnothing 35$ mm, mounting thread L 57mm
- SS-flex hose DN8, length 500mm, connection $1/2"$ with backflow preventers, operating pressure 10bar, test pressure 32bar, burst pressure 95bar, DVGW-approved
- riser pipe 690mm
- swivel spout HU-type, $\varnothing 20$ mm, spout length 300mm, with aerator, spout height 250mm
- SS spring, $\varnothing 38,5$ mm, wire- $\varnothing 6$ mm, with black plastic hose guard
- sturdy spray gun with high flow rate, type Classic
- mounting components, black plastic with stainless steel rods, 250mm wall mount included
- hose, L 1000mm, PVC/SS/PVC, kink-guards, connection $1/2"$, operating pressure 10bar, burst pressure 40bar, T.max 90°C, KTW-approved