


Iteml-No. 548865

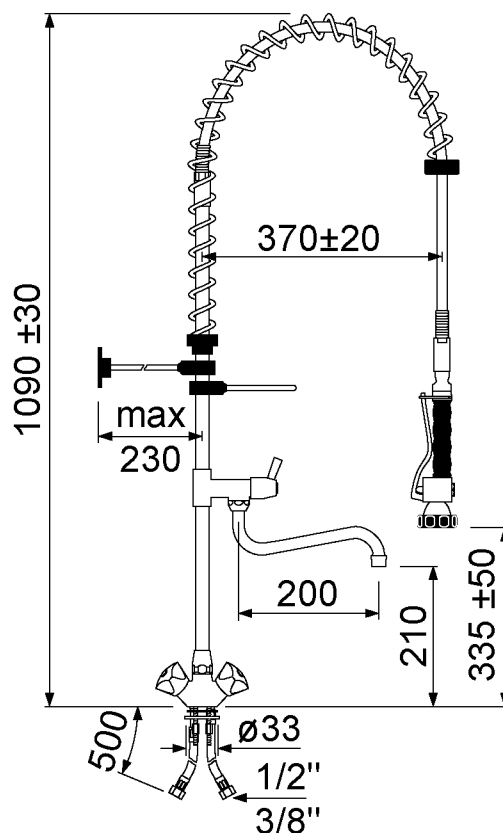

Technical Data

version	with monobloc tap
type	Blue line
upper part	tap head $1/2''$

description	with swivel spout 200mm
connection	$1/2''$ - $3/8''$
hose length	500mm
table opening	$\varnothing 33$ mm

Product Information

- monobloc tap chromed brass, tap head $1/2''$ with triangular handle, table opening $\varnothing 33$ mm, mounting thread length 500mm
- SS-hose, DN8, length 500mm, connection $1/2''$ ($3/8''$ with adaptors), with backflow preventers, operating pressure 10bar, test pressure 32bar, burst pressure 95bar, DVGW approved
- riser pipe, stainless steel, length 715mm, with ceramic upper part, rotation angle 90°
- swivel spout S-type, $\varnothing 18$ mm, spout projection 200mm, with aerator, spout height 210mm
- shower spring, stainless steel, $\varnothing 38,5$ mm, wire- $\varnothing 6$ mm, with black hose protector
- durable spray gun with high flow rate (16l/min at 3bars), type Classic Line
- mounting components black plastic with SS shafts, including wall mount 230mm, (can be cut to length)
- shower hose, length 1000mm, DN10, PVC/SS/PVC, with bend preventers, connection $1/2''$, operating pressure 10bar, T.max 90°C , KTW approved