

HVAC CONTROL

RoHS c  CE

FTPT02-004I_121001

Series KLT11D


Thermostat KLT11D



FEATURES:

- Cooling or heating control.
- One input probe.
- Probe type NTC or PTC selectable by parameter.
- Output to one SPDT relay.
- Static defrosting.
- Temperature limit on display during defrosting.
- Error indication and fault function: 50 % cycle.
- Easy access to parameters by code.
- Input for parameter-programming device KLKEY.

HOW TO ORDER:

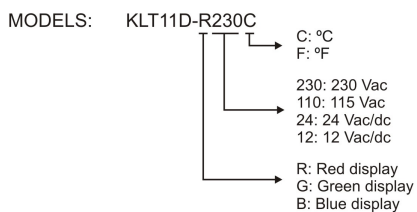

Options: Ask to factory

AVAILABLE MODELS:

- KLT11D-R230C
- KLT11D-R110C
- KLT11D-R12C
- KLT11D-R24C

SPECIFICATIONS:

Panel mounting

Cutout: 71 x 29 mm (2.79 x 1.14 inch)

Dimensions

Front: 76,5 x 36 mm (3.01 x 1.41 inch)

Depth: 62 mm (2.44 inch)

Measurement range

-50°C to 150°C / -58°F to 302°F

Accuracy

Better than 1% of full scale

Resolution

1°

Probe

PTC (1000 Ohms, 25°C) / NTC

Output


SPDT Relay Resistive load 16A
1HP 240Vac -- 10FLA, 60LRA 240Vac

IP Protection

Front: IP64

Rear: IP20

WIRING CONNECTIONS:

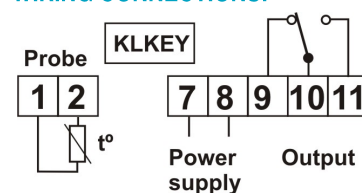

KELD



HEADQUARTERS

Polígono Empresarium. C/Lentisco, 15.
50720 La Cartuja Baja. Zaragoza. (Spain)

Tel: +34 976 429 099 · Fax: +34 976 593532

E-mail: keld@keld.es · web: www.keld.es

GPS: N 41.5863 W 0.82531