

# HVAC CONTROL

RoHS   

FTPT05-0011\_121001

Series KLH11

## Humidity Control KLH11




### FEATURES:

- Humidifying or dehumidifying control.
- One input probe (probe type selectable by parameter).
- Output to one SPDT relay.
- Error indication and fault function: 50 % cycle.
- Easy access to parameters by code.

### HOW TO ORDER:

MODELS: KLH11-G230



Options: Ask to factory

### AVAILABLE MODELS:

- KLH11-G230
- KLH11-G110

### SPECIFICATIONS:

#### Panel mounting

Cutout: 71 x 29 mm (2.79 x 1.14 inch)

#### Dimensions

Front: 76,5 x 36 mm (3.01 x 1.41 inch)

Depth: 60 mm (2.36 inch)

#### Measurement range

0 to 100 % RH

#### Accuracy

+/- 1% RH

#### Resolution

1%

#### Probe

(0 - 1V) / (0 - 3V) / (4 - 20mA) Probe

#### Output

SPDT Relay Resistive load 16A


1HP 240Vac -- 10FLA, 60LRA 250Vac

#### IP Protection

Front: IP64

Back: IP20

### WIRING CONNECTIONS:

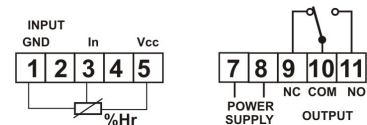

# KELD



### HEADQUARTERS

Polígono Empresarium. C/Lentisco, 15.  
50720 La Cartuja Baja. Zaragoza. (Spain)

Tel: +34 976 429 099 · Fax: +34 976 593532

E-mail: keld@keld.es · web: www.keld.es

GPS: N 41.5863 W 0.82531