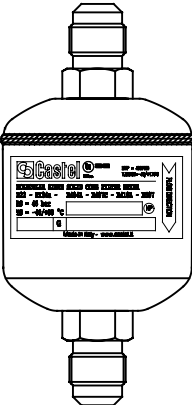
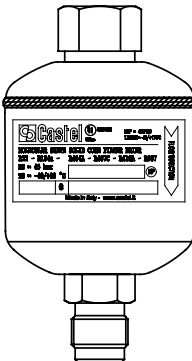



FILTRI DISIDRATATORI A CARTUCCIA SOLIDA 100% SETACCIO MOLECOLARE - ATTACCHI SAE FLARE - OMOLOGATI DA UNDERWRITERS LABORATORIES INC.
 SOLID CORE FILTER DRIERS 100% MOLECULAR SIEVES - SAE FLARE CONNECTIONS - APPROVED BY UNDERWRITERS LABORATORIES INC.
 FILTRES DÉSHYDRATEURS AVEC CARTOUCHE SOLIDE 100% TAMIS MOLECULAIRE - RACCORDS SAE FLARE - HOMOLOGUÉS PAR UNDERWRITERS LABORATORIES INC.
 FILTERTROCKNER MIT 100% MOLEKULARSIEB - BÖRDELANSCHLÜSSE - ZUGELASSEN VON UNDERWRITERS LABORATORIES INC.

Disegno Drawing Dessin Zeichnung	N° catalogo Part number N° catalogue Katalog Nr.	Codice internazionale International code Code international Internationaler Code	Attacchi Connections Raccords Anschlüsse SAE Flare	Cubatura nominale Nominal volume Cubature nominale Nominaler Rauminhalt [cm ³]	PS [bar]	TS [°C]		Confezione n° pz Package pcs Emballage Verpackung
						min	max	
	4303/2	032	1/4"	50	45 (1)	-40	+80	45
	4303/3	033	3/8"	50				45
	4305/2	052	1/4"	80				34
	4305/3	053	3/8"	80				34
	4308/2	082	1/4"	130				24
	4308/3	083	3/8"	130				24
	4308/4	084	1/2"	130				24
	4316/2	162	1/4"	250				28
	4316/3	163	3/8"	250				28
	4316/4	164	1/2"	250				28
	4316/5	165	5/8"	250				28
	4330/3	303	3/8"	500				12
	4330/4	304	1/2"	500				12
	4330/5	305	5/8"	500				12
	4332/4	304	1/2"	500				15
	4332/5	305	5/8"	500				15
	4341/4	414	1/2"	670				14
	4341/5	415	5/8"	670				14
4341/6	416	3/4"	670	14				
	4303/2F	-	1/4"	50	45 (1)	-40	+80	45
	4305/2F		1/4"	80				34
	4308/2F		1/4"	130				24
	4308/3F		3/8"	130				24
	4316/3F		3/8"	250				28

Note:

- (1): MWP = 435 psi in conformità a omologazione UL per filtri serie 4303, 4305, 4316, 4332
 MWP = 400 psi in conformità a omologazione UL per filtri serie 4308, 4330, 4341
- (1): MWP = 435 psi according to UL approval for filters series 4303, 4305, 4316, 4332
 MWP = 400 psi according to UL approval for filters series 4308, 4330, 4341
- (1): MWP = 435 psi conformément à homologation UL pour filtres séries 4303, 4305, 4316, 4332
 MWP = 400 psi conformément à homologation UL pour filtres séries 4308, 4330, 4341
- (1): MWP = 435 psi in Übereinstimmung zur UL-Zulassung für Filter der Serie 4303, 4305, 4316, 4332
 MWP = 400 psi in Übereinstimmung zur UL-Zulassung für Filter der Serie 4308, 4330, 4341

Disegno Drawing Dessin Zeichnung	N° catalogo Part number N° catalogue Katalog Nr.	Codice internazionale International code Code international Internationaler Code	Attacchi Connections Raccords Anschlüsse				Cubatura nominale Nominal volume Cubature nominale Nominaler Rauminhalt [cm³]	PS [bar]	TS [°C]		Confezione n° pz Package pcs Emballage Verpackung
			ODS		ODM				min	max	
			Ø [in.]	Ø [mm]	Ø [in.]	Ø [mm]					
	4303/2S	032S	1/4"	-	3/8"	-	50	45 (1)	-40	+80	45
	4303/2.5S	-	5/16"	-	3/8"	-	50				45
	4303/3S	033S	3/8"	-	1/2"	-	50				45
	4305/2S	052S	1/4"	-	3/8"	-	80				34
	4305/3S	053S	3/8"	-	1/2"	-	80				34
	4305/M10S	-	-	10	-	12	80				34
	4308/2S	082S	1/4"	-	3/8"	-	130				24
	4308/3S	083S	3/8"	-	1/2"	-	130				24
	4308/M10S	-	-	10	-	12	130				24
	4308/M12S	-	-	12	-	14	130				24
	4308/4S	084S	1/2"	-	5/8"	16	130				24
	4316/3S	163S	3/8"	-	1/2"	-	250				28
	4316/M10S	-	-	10	-	12	250				28
	4316/M12S	-	-	12	-	14	250				28
	4316/4S	164S	1/2"	-	5/8"	16	250				28
	4316/5S	165S	5/8"	16	3/4"	-	250				28
	4316/7S	167S	7/8"	-	1.1/8"	-	250				28
	4330/3S	303S	3/8"	-	1/2"	-	500				12
	4330/4S	304S	1/2"	-	5/8"	16	500				12
	4330/5S	305S	5/8"	16	3/4"	-	500				12
	4330/7S	307S	7/8"	-	1.1/8"	-	500				12
	4330/9S	309S	1.1/8"	-	1.3/8"	35	500				12
	4332/4S	304S	1/2"	-	5/8"	16	500				15
	4332/5S	305S	5/8"	16	3/4"	-	500				15
	4341/4S	414S	1/2"	-	5/8"	16	670				14
	4341/5S	415S	5/8"	16	3/4"	-	670				14
	4341/6S	416S	3/4"	-	7/8"	-	670				14
	4341/7S	417S	7/8"	-	1.1/8"	-	670				14
	4375/4S	754S	1/2"	-	5/8"	16	1340				1
	4375/5S	755S	5/8"	16	3/4"	-	1340				1
4375/6S	756S	3/4"	-	7/8"	-	1340	1				
4375/7S	757S	7/8"	-	1.1/8"	-	1340	1				
4375/9S	759S	1.1/8"	-	1.3/8"	35	1340	1				

Note:

- (1): MWP = 435 psi in conformità a omologazione UL per filtri serie 4303 , 4305 , 4316 , 4332 , 4375
 MWP = 400 psi in conformità a omologazione UL per filtri serie 4308 , 4330 , 4341
- (1): MWP = 435 psi according to UL approval for filters series 4303 , 4305 , 4316 , 4332 , 4375
 MWP = 400 psi according to UL approval for filters series 4308 , 4330 , 4341
- (1): MWP = 435 psi conformément à homologation UL pour filtres séries 4303 , 4305 , 4316 , 4332 , 4375
 MWP = 400 psi conformément à homologation UL pour filtres séries 4308 , 4330 , 4341
- (1): MWP = 435 psi in Übereinstimmung zur UL-Zulassung für Filter der Serie 4303 , 4305 , 4316 , 4332 , 4375
 MWP = 400 psi in Übereinstimmung zur UL-Zulassung für Filter der Serie 4308 , 4330 , 4341