

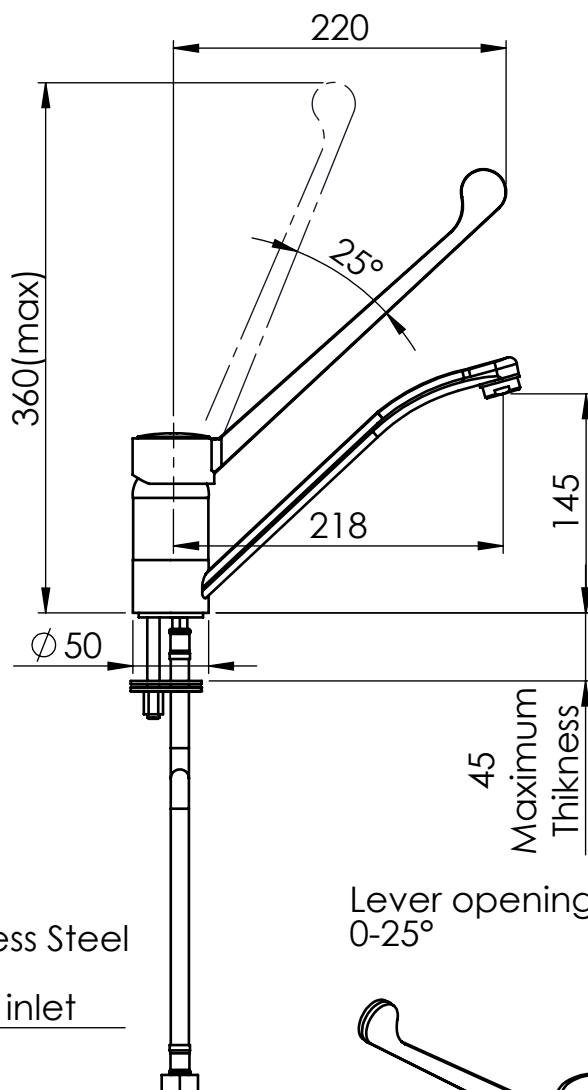
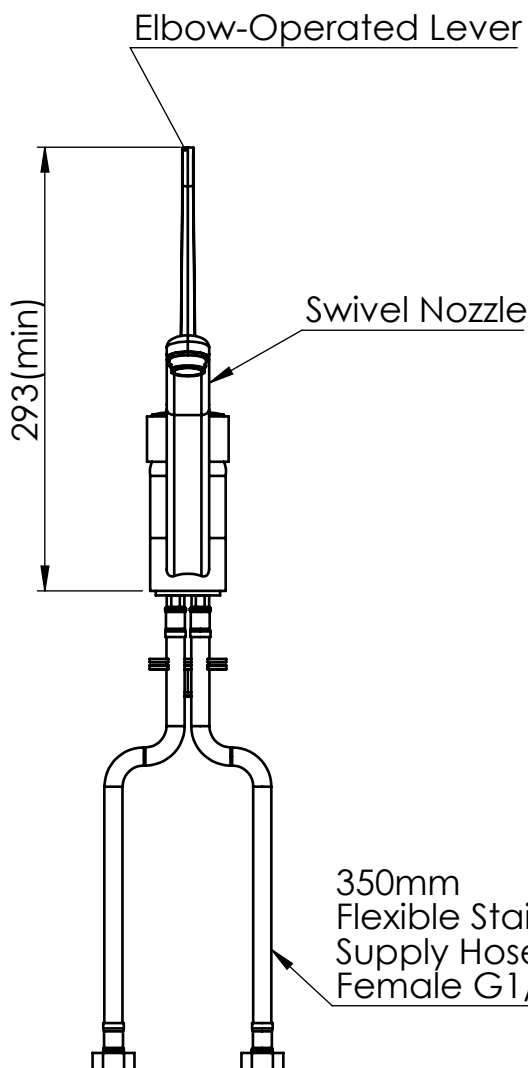


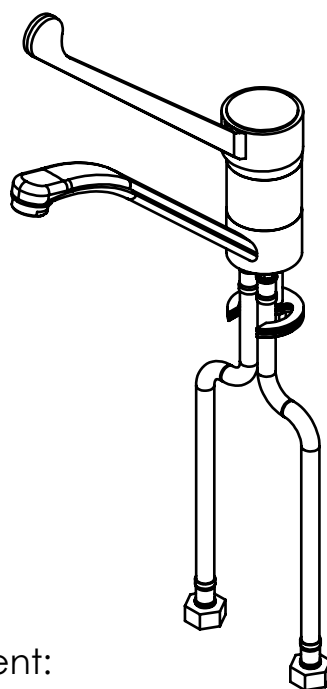

Lever opening angle:
0-25°

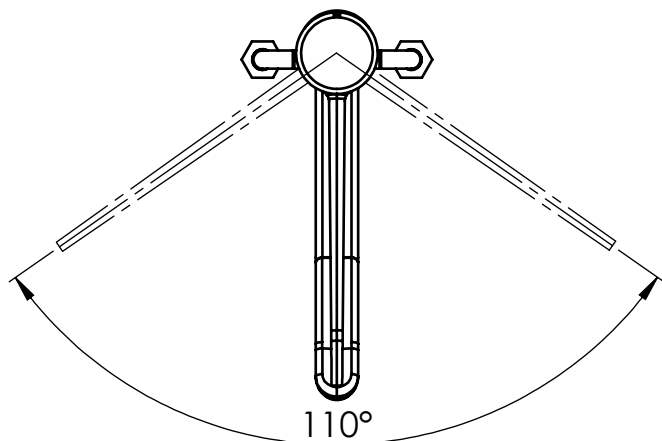

Rough-In Requirement:
35mm Mounting Hole

TITLE / DESCRIZIONE

Single hole, deck-mount with 220mm long Sanitary Lever mixing faucet with embended swivel nozzle, G1/2" female inlets, ceramic cartridge, brass, chrome plated, Sanitary Lever – fiber glass reinforced Polyamide.

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS

SCALE /
SCALA 1:5

NUMBER / CODICE DIS.

CHD / VER

DATE /
DATA 09/06/2020


MODEL / PRODOTTO

1S.2962.00.82

APPR

SHEET /
PAG 1 of 2

ITEM NO.	SALES NO.	DESCRIPTION
1	P065	FLOW REGULATOR M24x1
2	H002	ELBOW OPERATED GRAY LEVER (L.220mm)
3	V0A0	CARTRIDGE Ø40mm FLAT BOTTOM (Roub.Douchette)
4	P068	FIXING KIT (2920-2962)
5	F011	L.35cm Flex S.S. Hose Ø12-DN8 Female G1/2" (C)

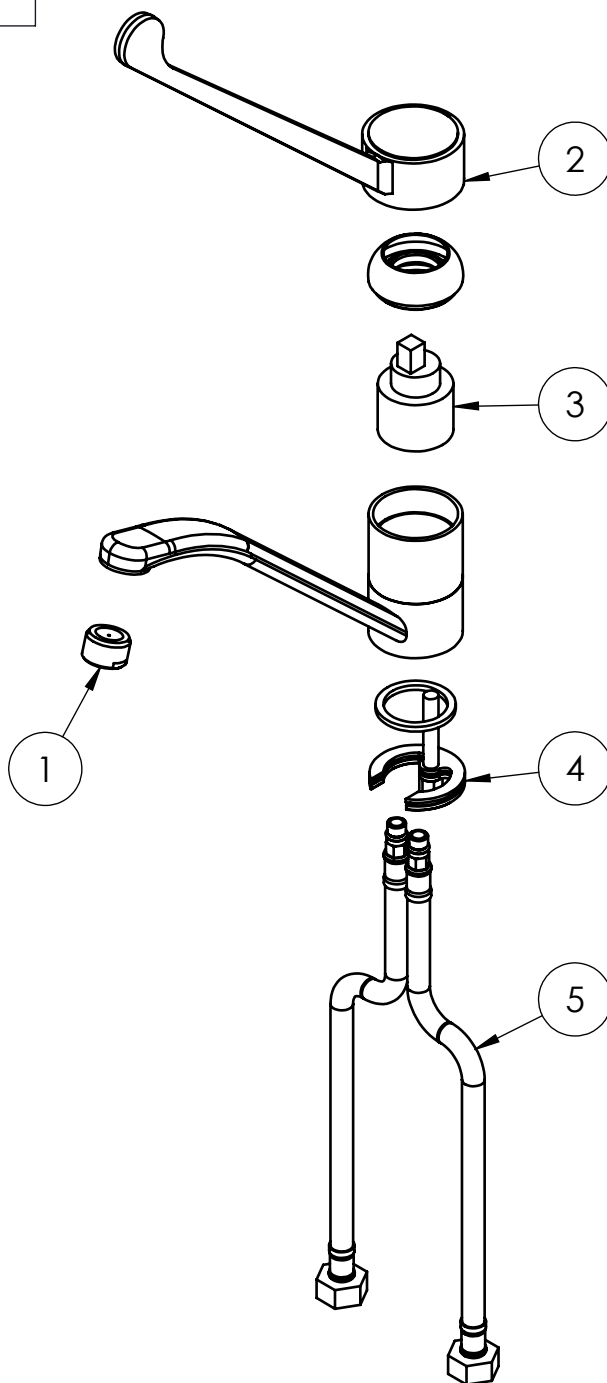

TITLE / DESCRIZIONE

Single hole, deck-mount with 220mm long Sanitary Lever mixing faucet with embended swivel nozzle, G1/2" female inlets, ceramic cartridge, brass, chrome plated, Sanitary Lever – fiber glass reinforced Polyamide.

DRN / DIS

SCALE /
SCALA 1:4

NUMBER / CODICE DIS.

CHD / VER

DATE /
DATA

MODEL / PRODOTTO

1S.2962.00.82

APPR

SHEET /
PAG 2 of 2